




Ex-d EXIOS Cable Glands
 Ex-d Nickel Plated Brass & Stainless Steel Glands
 Ex-e Nylon Glands
 Ex-e Multi-Hole & Romex Glands
 Ex-e Nickel Plated Brass & Stainless Steel Glands
 Ex-e EMI / RFI Nickel Plated Brass Glands
 Ex-e Conduit & Fitting Systems
 Ex-e / Ex-d Accessories
 Technical Information

Ex-e Nylon / Nickel Plated Brass - Multi-Hole Cable Glands - NPT Threads



For Non-Armored Cable

Nylon & Nickel Plated Brass, Cable Glands with Multi-Hole Inserts, Hazardous Duty Locations, V0, UL94, NEMA 6, IP 68

Part Numbers			Thread Type & Size	Dimensions in Inches (mm)			Part Numbers of Inserts only
-4°F to 203°F (-20°C to 95°C)	-4°F to 203°F (-20°C to 95°C)	-4°F to 203°F (-20°C to 95°C)		No. of Holes	Diameter of Holes		
Black	Gray	Nickel Plated Brass	Page 55 for Thread Specs		mm	Inches	
				3/4" NPT	4	6.0	.24
CD21N1-BX	CD21N1-GX	CD21N1-MX	3		7.0	.28	1.089.2101.19
CD21N2-BX	CD21N2-GX	CD21N2-MX	2		8.0	.31	1.089.2102.19
CD21N3-BX	CD21N3-GX	CD21N3-MX	4		5.0	.20	1.089.2103.19
CD21N4-BX	CD21N4-GX	CD21N4-MX	1		8.0	.31	1.089.2104.19
CD21N5-BX	CD21N5-GX	CD21N5-MX	4		5.2	.20	1.089.2105.19
CD21N6-BX	CD21N6-GX	CD21N6-MX	3		5.2	.20	1.089.2106.19
CD21N7-BX	CD21N7-GX	CD21N7-MX	4/1		5.2/3.7	.20/.15	1.089.2107.19
CD21N8-BX	CD21N8-GX	CD21N8-MX	2		7.4	.29	1.089.2108.19
CD21N9-BX	CD21N9-GX	CD21N9-MX	Solid Insert			1.089.2199.19	
CD21NP-BX	CD21NP-GX	CD21NP-MX					
CD29N1-BX	CD29N1-GX	CD29N1-MX	1" NPT		6	6.5	.26
CD29N2-BX	CD29N2-GX	CD29N2-MX		4	9.0	.35	1.089.2901.19
CD29N3-BX	CD29N3-GX	CD29N3-MX		4	9.5	.37	1.089.2902.19
CD29NP-BX	CD29NP-GX	CD29NP-MX		Solid Insert			1.089.2999.19
CD29L1-BX	CD29L1-GX	-	1-1/4" NPT	6	6.5	.26	1.089.2900.19
CD29L2-BX	CD29L2-GX	-		4	9.0	.35	1.089.2901.19
CD29L3-BX	CD29L3-GX	-		4	9.5	.37	1.089.2902.19
CD29LP-BX	CD29LP-GX	-		Solid Insert			1.089.2999.19
CD36N1-BX	CD36N1-GX	-	1-1/2" NPT	5	9.0	.35	1.089.3600.19
CD36N2-BX	CD36N2-GX	-		7	9.0	.35	1.089.3601.19
CD36N3-BX	CD36N3-GX	-		6	8.0	.31	1.089.3602.19
CD36N4-BX	CD36N4-GX	-		2	15.0	.59	1.089.3603.19
CD36NP-BX	CD36NP-GX	-	Solid Insert			1.089.3699.19	


* Note: IECEx approval apply to only Nickel Plated Brass Multi-Hole

***Note: InMetro only applies to all Nylon Cable Glands.

**Note: UL f1 (746C) rating applies to Black Nylon Fittings only.

* Note: This Insert has slotted holes.

For Specifications and Dimensions for Black & Gray Nylon (see page 19) or Nickel Plated Brass (see page 32) where the appropriate Fittings are listed.

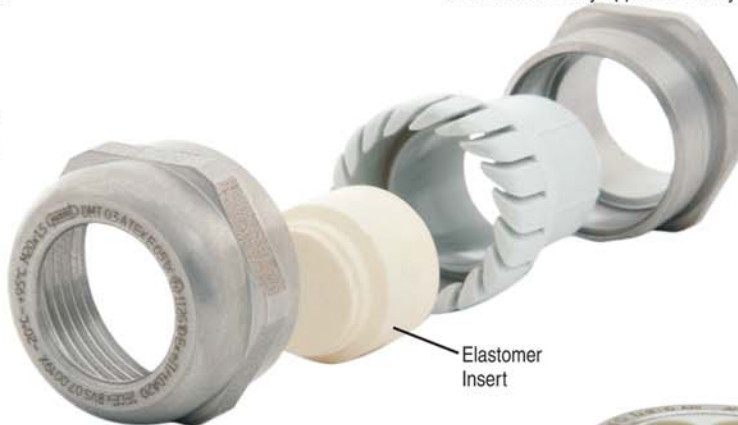

Elastomer Insert



Additional Information

- Hummel Multi-hole solutions meet IP68 as long as the conductor outer diameter is not smaller than 20% of the hole diameter, or max 1 mm (.04") each. **We recommend a customer perform their own testing if IP68 rating needs to be achieved.**

