

Ex-d EXIOS Cable Glands
 Ex-d Nickel Plated Brass & Stainless Steel Glands
 Nylon Glands
 Ex-e Multi-Hole & Romex Glands
 Ex-e Nickel Plated Brass & Stainless Steel Glands
 Ex-e EMI / RFI Nickel Plated Brass Glands
 Ex-e Conduit & Fitting Systems
 Ex-e / Ex-d Accessories
 Technical Information



II 2G 1D

Ex-e Nickel Plated Brass - Cable Glands with Clamp (Nylon/PVDF) Splines - NPT / Metric / PG Threads





For Non-Armored Cable

Nickel Plated Brass Cable Glands with MZ Clamp for Hazardous Duty Locations, **Nylon/PVDF Splines with Buna-N/Viton® Inserts**, V0, NEMA 6, 150 PSIG, IP 68/69K, 10 BAR

Part Numbers		Cable Range	Thread Type & Size	Dimensions in Inches (mm)			
-4°F to 203°F (-20°C to 95°C)	-4°F to 266°F (-20°C to 130°C)			A	B	C	F ₁ /F
		Inches (mm)		Clearance Hole +.01" (+.25 mm)	Body Length (Clamp)	Thread Length	Wrench Flats
CD09NA-EZ	CD09NA-EZ-V	.16 - .31 (4 - 8)	3/8" NPT	.68 (17.2)	1.10 (28)	.59 (15)	.67 (17) / .75 (19)
CD13NA-EZ	CD13NA-EZ-V	.28 - .47 (7 - 12)	1/2" NPT	.83 (21.1)	1.30 (33)	.51 (13)	.87 (22) / .94 (24)
CD21NA-EZ	CD21NA-EZ-V	.51 - .71 (13 - 18)	3/4" NPT	1.05 (26.7)	1.46 (37)	.51 (13)	1.18 (30)
CD29NA-EZ	-	.79 - .98 (20 - 25)	1" NPT	1.35 (34.3)	1.69 (43)	.75 (19)	1.57 (40)
CD12MA-EZ	CD12MA-EZ-V	.12 - .26 (3 - 6.5)	M12 x 1.5	.47 (12)	1.02 (26)	.26 (6.5)	.55 (14)
CD16MA-EZ	CD16MA-EZ-V	.16 - .31 (4 - 8)	M16 x 1.5	.63 (16)	1.10 (28)	.24 (6)	.75 (19)
CD17MA-EZ	CD17MA-EZ-V	.24 - .39 (6 - 10)	M16 x 1.5	.73 (16)	1.18 (30)	.24 (6)	.79 (20)
CD20MA-EZ	CD20MA-EZ-V	.24 - .47 (6 - 12)	M20 x 1.5	.79 (20)	1.30 (33)	.24 (6)	.87 (22)
CD22MA-EZ	CD22MA-EZ-V	.39 - .55 (10 - 14)	M20 x 1.5	.79 (20)	1.30 (33)	.24 (6)	.94 (24)
CD25MA-EZ	CD25MA-EZ-V	.55 - .71 (14 - 18)	M25 x 1.5	.98 (25)	1.46 (37)	.28 (7)	1.18 (30)
CD32MA-EZ	CD32MA-EZ-V	.79 - .98 (20 - 25)	M32 x 1.5	1.26 (32)	1.69 (43)	.31 (8)	1.57 (40)
CD40MA-EZ	CD40MA-EZ-V	.94 - 1.26 (24 - 32)	M40 x 1.5	1.57 (40)	1.97 (50)	.31 (8)	1.97 (50)
CD50MA-EZ	-	1.26 - 1.50 (32 - 38)	M50 x 1.5	1.97 (50)	2.01 (51)	.35 (9)	2.24 (57)
CD63MA-EZ	-	1.46 - 1.73 (37 - 44)	M63 x 1.5	2.48 (63)	2.04 (52)	.39 (10)	2.52 (64) / 2.68 (68)
CD07AA-EZ	CD07AA-EZ-V	.12 - .26 (3 - 6.5)	PG 7	.49 (12.5)	1.02 (26)	.20 (5)	.55 (14)
CD09AA-EZ	CD09AA-EZ-V	.16 - .31 (4 - 8)	PG 9	.60 (15.2)	1.10 (28)	.24 (6)	.67 (17)
CD11AA-EZ	CD11AA-EZ-V	.24 - .39 (6 - 10)	PG 11	.73 (18.5)	1.14 (29)	.24 (6)	.79 (20)
CD13AA-EZ	CD13AA-EZ-V	.28 - .47 (7 - 12)	PG 13	.80 (20.3)	1.30 (33)	.24 (6)	.87 (22)
CD16AA-EZ	CD16AA-EZ-V	.39 - .55 (10 - 14)	PG 16	.89 (22.5)	1.30 (33)	.24 (6)	.94 (24)
CD21AA-EZ	CD21AA-EZ-V	.51 - .71 (13 - 18)	PG 21	1.12 (28.4)	1.46 (37)	.28 (7)	1.18 (30)
CD29AA-EZ	CD29AA-EZ-V	.79 - .98 (20 - 25)	PG 29	1.47 (37.3)	1.69 (43)	.31 (8)	1.57 (40)
CD36AA-EZ	CD36AA-EZ-V	.94 - 1.26 (24 - 32)	PG 36	1.85 (47)	1.97 (50)	.31 (8)	1.97 (50)
CD42AA-EZ	CD42AA-EZ-V	1.26 - 1.50 (32 - 38)	PG 42	2.13 (54.1)	2.01 (51)	.35 (9)	2.24 (57)
CD48AA-EZ	CD48AA-EZ-V	1.46 - 1.73 (37 - 44)	PG 48	2.34 (59.4)	2.04 (52)	.39 (10)	2.52 (64)

Viton® is a federally registered trademark of DuPont Dow Elastomer.

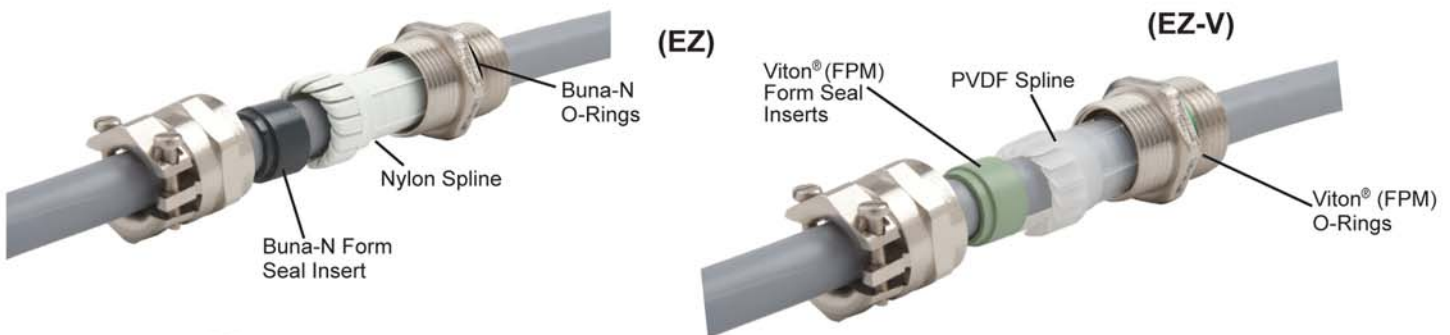

Nickel Plated Brass with MZ Clamps
• Extra Pull-out Resistance

