

NEW

SEALCON

Committed to Excellence!

Ex „e“ Enclosure



- II 2GD
- Ex e IIC Gb
- Ex tb III C Db
- -60° C up to +100° C (-76° F up to +212° F)



Ex „e“ Enclosure

Enclosures of the HUMMEL AG have been tested by an internationally recognised and certified laboratory. They have been certified through type approval testing for applications in areas with potentially explosive dust and gas atmospheres. Aluminium die-cast enclosures can be used as terminal and control enclosures. Furthermore they are constructed to accept corresponding mechanical and electrical equipment.


- According the latest EN Standards
EN 60079-0:2012,
EN 60079-7:2007,
EN 60079-31: 2008
- Ex „e“
- Zones 1, 2 , 21, 22
- IIC Gb / IIIC Db
- -60° C up to +100° C (-76° F up to +212° F)
- Silicone Seal
- Sira 12ATEX3213U

Online configuration and requesting

www.hummel.com



Technical information	
Material	Aluminium / copper free
Seals	Silicone
Temperature Range	-60° C up to +100° C (-76° F up to +212° F)
Protection	IP65
Cover Screws	Stainless steel, captive
Color	RAL 7001 (silver-grey)

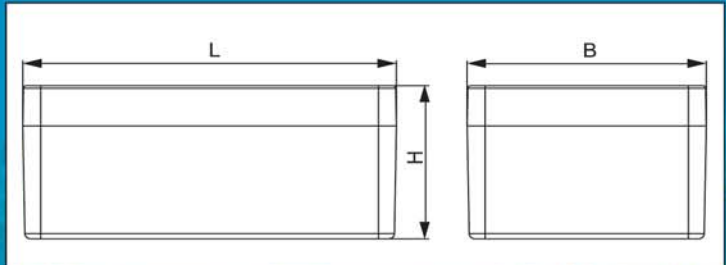

Size in mm			Part No.
L	B	H	silicone-gasket
64	58	36	3.150.9657.71
64	98	36	3.150.9657.88
64	150	36	3.150.9657.95
80	75	57	3.150.9658.01
80	125	57	3.150.9658.18
80	175	57	3.150.9658.25
80	250	57	3.150.9658.32
120	122	90	3.150.9658.50
122	220	90	3.150.9658.56
120	360	90	3.150.9658.64
160	160	90	3.150.9658.70
160	260	90	3.150.9658.87
160	360	90	3.150.9658.94
160	560	90	3.150.9659.00
230	200	110	3.150.9659.17
230	200	180	3.150.9659.24
230	280	110	3.150.9659.31
230	330	110	3.150.9659.48
230	330	180	3.150.9659.55
230	400	110	3.150.9659.62
230	600	110	3.150.9659.79
310	402	110	3.150.9659.86
310	402	180	3.150.9659.93
310	600	110	3.150.9660.06
310	600	180	3.150.9660.13

14853 E Hinsdale Ave. Suite D
Centennial, CO 80112-4240 USA
Phone: 303-699-1135 / 800-456-9012
Fax: 303-680-5344
Email: info@sealconusa.com
Web: www.sealconusa.com



Committed to Excellence!