



Ex-d EXIOS Cable Glands
 Ex-d Nickel Plated Brass & Stainless Steel Glands
 Ex-e Nickel Plated Brass & Stainless Steel Glands
 Ex-e Multi-Hole & Romex Glands
 Ex-e Nickel Plated Brass & Stainless Steel Glands
 Ex-e EMI / RFI Nickel Plated Brass Glands
 Ex-e Conduit & Fitting Systems
 Ex-e / Ex-d Accessories
 Technical Information

Ex-d (316L) Stainless Steel Cable Glands (Nylon/PVDF) Splines w/ Viton® - NPT / Metric





For Non-Armored Cable

Ex-d/Ex-e **Stainless Steel 316L (INOX)** Cable Glands for Hazardous Duty Locations, **Nylon/PVDF Spline with Viton® Inserts**, IP 68/69K, 10 BAR

Part Numbers		Cable Range	Thread Type & Size	Dimensions in Inches (mm)			
-76°F to 221°F (-60°C to 105°C)	-4°F to 266°F (-20°C to 130°C)			A	B	C	F
 (Nylon Spline)	 (PVDF Spline)	Inches (mm)	3/8" NPT 1/2" NPT 3/4" NPT	+ .01" (+.25 mm)	(Dome)	Thread Length	Wrench Flats
CD09NA-6X-D	CD09NA-6VX-D	.20 - .39 (5 - 10)					
CD09NR-6X-D	CD09NR-6VX-D	.12 - .28 (3 - 7)					
CD16NA-6X-D	CD16NA-6VX-D	.39 - .55 (10 - 14)					
CD16NR-6X-D	CD16NR-6VX-D	.28 - .47 (7 - 12)					
CD21NA-6X-D	CD21NA-6VX-D	.51 - .71 (13 - 18)					
CD21NR-6X-D	CD21NR-6VX-D	.35 - .63 (9 - 16)					
CD12MA-6X-D	CD12MA-6VX-D	.12 - .26 (3 - 6.5)	M12 x 1.5	.47 (12)	.75 (19)	.63 (16)	.55 (14)
CD12MR-6X-D	CD12MR-6VX-D	.08 - .20 (2 - 5)					
CD17MA-6X-D	CD17MA-6VX-D	.20 - .39 (5 - 10)	M16 x 1.5	.63 (16)	.87 (22)	.63 (16)	.79 (20)
CD17MR-6X-D	CD17MR-6VX-D	.12 - .28 (3 - 7)					
CD22MA-6X-D	CD22MA-6VX-D	.39 - .55 (10 - 14)	M20 x 1.5	.79 (20)	.98 (25)	.63 (16)	.94 (24)
CD22MR-6X-D	CD22MR-6VX-D	.28 - .47 (7 - 12)					
CD25MA-6X-D	CD25MA-6VX-D	.51 - .71 (13 - 18)	M25 x 1.5	.98 (25)	1.04 (26.5)	.63 (16)	1.18 (30)
CD25MR-6X-D	CD25MR-6VX-D	.35 - .63 (9 - 16)					
CD32MA-6X-D	CD32MA-6VX-D	.71 - .98 (18 - 25)	M32 x 1.5	1.26 (32)	1.26 (32)	.63 (16)	1.57 (40)
CD32MR-6X-D	CD32MR-6VX-D	.55 - .79 (14 - 20)					
CD40MA-6X-D	CD40MA-6VX-D	.87 - 1.26 (22 - 32)	M40 x 1.5	1.57 (40)	1.52 (38.5)	.63 (16)	1.97 (50)
CD40MR-6X-D	CD40MR-6VX-D	.79 - 1.02 (20 - 26)					

Viton® is a federally registered trademark of DuPont Dow Elastomer.

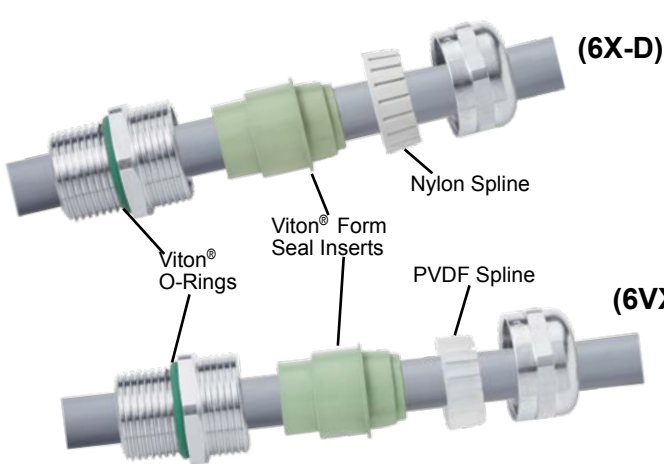

Suggested Clearance Hole for Non-Threaded Mounting



Longer Threads: All Ex-d EXIOS & Standard style cable glands now have longer threads to meet the new five thread engagement requirement. Metric threads require eight threads of engagement. Manufactured according to EN 60079-1 or IEC 60079-1, which addresses the ANSI B1.20.1/1.20.3. ANSI. NPT cable glands do not come with an O-Ring.