


For Non-Armored Cable


Nickel Plated Brass, Cable Glands with Romex® Inserts, Hazardous Duty Locations, V0, UL94, NEMA 6, IP 68

Part Numbers	Slot Size	Thread Type & Size	Dimensions in Inches (mm)			
			A	B	C	F <sub>1</sub> /F
-4°F to 203°F (-20°C to 95°C)						
Nickel Plated Brass  (Standard)	Inches (mm) H x W	Page 59 for Thread Specs	Clearance Hole  + .01" (+.25 mm)	Body Length  (Dome)	Thread Length  (Standard)	Wrench Flats
CD21NS-EB1	.24 x .55 (6 x 14)	3/4" NPT	1.05 (26.7)	.98 (25)	.51 (13)	1.18 (30)
CD21NS-EB2	.28 x .55 (7 x 14)					
CD29NS-EB1	.31 x .87 (8 x 22)	1" NPT	1.35 (34.3)	1.14 (29)	.75 (19)	1.57 (40)
CD22MS-EB1	.24 x .55 (6 x 14)	M20 x 1.5	.79 (20)	.94 (24)	.24 (6)	.94 (24)
CD22MS-EB2	.28 x .47 (7 x 12)					
CD25MS-EB1	.24 x .55 (6 x 14)	M25 x 1.5	.98 (25)	1.02 (26)	.28 (7)	1.18 (30)
CD25MS-EB2	.28 x .55 (7 x 14)					
CD32MS-EB1	.31 x .87 (8 x 22)	M32 x 1.5	1.26 (32)	1.22 (31)	.31 (8)	1.57 (40)
CD40MS-EB1	.39 x 1.12 (10 x 28.5)	M40 x 1.5	1.57 (40)	1.46 (37)	.31 (8)	1.97 (50)
CD40MS-EB2	.20 x 1.14 (5.5 x 29)					
CD40MS-EB3	.47 x 1.20 (12 x 30.5)					
CD40MS-EB4	.29 x 1.22 (7.5 x 31)					
CD50MS-EB1	.45 x 1.31 (11.5 x 33.5)	M50 x 1.5	1.97 (50)	1.46 (37)	.35 (9)	2.24 (57)
CD63MS-EB1	.47 x 1.50 (12 x 38)	M63 x 1.5	2.48 (63)	1.49 (38)	.39 (10)	2.52 (64) / 2.68 (68)
CD16AS-EB1	.24 x .55 (6 x 14)	PG 16	.89 (22.5)	.91 (23)	.26 (6.5)	.94 (24)
CD16AS-EB2	.28 x .47 (7 x 12)					
CD21AS-EB1	.24 x .55 (6 x 14)	PG 21	1.12 (28.4)	.94 (24)	.28 (7)	1.18 (30)
CD21AS-EB2	.28 x .55 (7 x 14)					
CD29AS-EB1	.31 x .87 (8 x 22)	PG 29	1.47 (37.3)	1.14 (29)	.31 (8)	1.57 (40)
CD36AS-EB1	.39 x 1.12 (10 x 28.5)	PG 36	1.85 (47)	1.37 (35)	.31 (8)	1.97 (50)
CD36AS-EB2	.20 x 1.14 (5.5 x 29)					
CD36AS-EB3	.47 x 1.18 (12 x 30)					
CD36AS-EB4	.29 x 1.22 (7.5 x 31)					
CD42AS-EB1	.45 x 1.31 (11.5 x 33.5)	PG 42	2.13 (54.1)	1.46 (37)	.35 (9)	2.24 (57)
CD48AS-EB2	.47 x 1.50 (12 x 38)	PG 48	2.34 (59.4)	1.49 (38)	.39 (10)	2.52 (64)

ROMEX® is a federally registered trademark of Southwire Company.

Cable Glands with Inserts for Flat Cables

These form seals are also available with Cable Glands made of other materials. (Nickel Plated Brass, Stainless Steel, etc.)

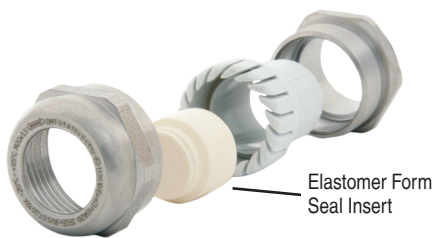

\* Additional UL Information

- Our FLAKA (for Romex® style cable) HSK-K-Ex PG16 are UL listed (UL file # E168975)
- To meet UL, only Romex® style cable (flat top and bottom) can be used with this style Cable Gland (No Zip Cable, No Ribbon cable, etc.)

