

Ex-d EXIOS Cable Glands
 Ex-d Nickel Plated Brass & Stainless Steel Glands
 Ex-e Nylon Glands
 Ex-e Multi-Hole & Romex Glands
 Ex-e Nickel Plated Brass & Stainless Steel Glands
 Ex-e EMI / RFI Nickel Plated Brass Glands
 Ex-e Conduit & Fitting Systems
 Ex-e / Ex-d Accessories
 Technical Information







Ex-e Nickel Plated Brass (Std/Low Temp) Cable Glands NPT & Metric / Metric Elongated Threads



For Non-Armored Cable

Nickel Plated Brass Cable Glands for Hazardous Duty Locations, Low Temperature, V0, UL94, NEMA 6, 150 PSIG, IP 68/69K, 10 BAR

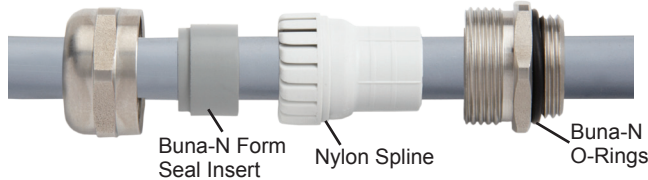


Part Numbers		Cable Range	Thread Type & Size	Dimensions in Inches (mm)			
-4°F to 203°F (-20°C to 95°C)	-76°F to 203°F (-60°C to 95°C)			A	B	C	F ₁ /F
		Inches (mm)	Page 55 for Thread Specs	Clearance Hole	Body Length	Thread Length	Wrench Flats
(Standard)	(Standard Low Temp.)			+ .01" (+.25 mm)	(Dome)	(Standard & Low Temp.)	
CD09NA-MX	CC09NA-MX	.16 - .31 (4 - 8)	3/8" NPT	.68 (17.2)	.83 (21)	.59 (15)	.67 (17) / .75 (19)
CD09NR-MX	CC09NR-MX	.08 - .24 (2 - 6)		1/2" NPT	.83 (21.1)	.94 (24)	.51 (13)
CD13NA-MX	CC13NA-MX	.24 - .47 (6 - 12)	3/4" NPT		1.05 (26.7)	.98 (25)	.51 (13)
CD13NR-MX	CC13NR-MX	.20 - .35 (5 - 9)		1" NPT	1.35 (34.3)	1.14 (29)	.75 (19)
CD21NA-MX	CC21NA-MX	.55 - .71 (14 - 18)					
CD21NR-MX	CC21NR-MX	.39 - .63 (10 - 16)					
CD29NA-MX	CC29NA-MX	.79 - .98 (20 - 25)					
CD29NR-MX	CC29NR-MX	.51 - .79 (13 - 20)					



(MX)

Elongated Metric Threads are recommend where the Cable Glands has to pass through a thick wall or the application just needs the Extra Thread Length.

Nickel Plated Brass Cable Glands for Hazardous Duty Locations, Low Temperature, Protection Class V0, UL94, NEMA 6, 150 PSIG, IP 68/69K, 10 BAR

Part Numbers			Cable Range	Thread Type & Size	Dimensions in Inches (mm)				
-4°F to 203°F (-20°C to 95°C)	-76°F to 203°F (-60°C to 95°C)	-4°F to 203°F (-20°C to 95°C)			A	B	C	D	F ₁ /F
			Inches (mm)	Page 55 for Thread Specs	Clearance Hole	Body Length	Thread Length	Thread Length	Wrench Flats
(Standard)	(Standard Low Temp.)	(Elongated)			+ .01" (+.25 mm)	(Dome)	(Standard & Low Temp.)	(Elongated)	
CD12MA-MX	CC12MA-MX	CD12DA-MX	.12 - .26 (3 - 6.5)	M12 x 1.5	.47 (12)	.75 (19)	.26 (6.5)	.39 (10)	.55 (14)
CD12MR-MX	CC12MR-MX	CD12DR-MX	.08 - .20 (2 - 5)		M16 x 1.5	.63 (16)	.83 (21)	.24 (6)	.39 (10)
CD16MA-MX	CC16MA-MX	CD16DA-MX	.16 - .31 (4 - 8)	M16 x 1.5		.63 (16)	.87 (22)	.24 (6)	.39 (10)
CD16MR-MX	CC16MR-MX	CD16DR-MX	.08 - .24 (2 - 6)		M20 x 1.5	.79 (20)	.91 (23)	.24 (6)	.39 (10)
CD17MA-MX	CC17MA-MX	CD17DA-MX	.24 - .39 (6 - 10)	M20 x 1.5		.79 (20)	.94 (24)	.24 (6)	.39 (10)
CD17MR-MX	CC17MR-MX	CD17DR-MX	.12 - .28 (3 - 7)		M25 x 1.5	.98 (25)	1.02 (26)	.28 (7)	.47 (12)
CD20MA-MX	CC20MA-MX	CD20DA-MX	.24 - .47 (6 - 12)	M32 x 1.5		1.26 (32)	1.22 (31)	.31 (8)	.47 (12)
CD20MR-MX	CC20MR-MX	CD20DR-MX	.20 - .35 (5 - 9)		M40 x 1.5	1.57 (40)	1.46 (37)	.31 (8)	.59 (15)
CD22MA-MX	CC22MA-MX	CD22DA-MX	.39 - .55 (10 - 14)	M50 x 1.5		1.97 (50)	1.46 (37)	.35 (9)	.59 (15)
CD22MR-MX	CC22MR-MX	CD22DR-MX	.28 - .47 (7 - 12)		M63 x 1.5	2.48 (63)	1.50 (38)	.39 (10)	.59 (15)
CD25MA-MX	CC25MA-MX	CD25DA-MX	.55 - .71 (14 - 18)						
CD25MR-MX	CC25MR-MX	CD25DR-MX	.39 - .63 (10 - 16)						
CD32MA-MX	CC32MA-MX	CD32DA-MX	.79 - .98 (20 - 25)						
CD32MR-MX	CC32MR-MX	CD32DR-MX	.51 - .79 (13 - 20)						
CD40MA-MX	CC40MA-MX	CD40DA-MX	.87 - 1.26 (22 - 32)						
CD40MR-MX	CC40MR-MX	CD40DR-MX	.79 - 1.02 (20 - 26)						
CD50MA-MX	CC50MA-MX	CD50DA-MX	1.26 - 1.50 (32 - 38)						
CD50MR-MX	CC50MR-MX	CD50DR-MX	.98 - 1.22 (25 - 31)						
CD63MA-MX	CC63MA-MX	CD63DA-MX	1.46 - 1.73 (37 - 44)						
CD63MR-MX	CC63MR-MX	CD63DR-MX	1.14 - 1.38 (29 - 35)						

