


Ex-d/Ex-e Nickel Plated Brass Cable Glands w/ Clamp (Nylon) Splines w/ Viton® - NPT / Metric





For Non-Armored Cable

Ex-d/Ex-e **Nickel Plated Brass**, Cable Glands for Hazardous Duty Locations, **with Clamp**, Nylon Spline with Viton® Insert, IP 68/69K, 10 BAR

Part Numbers	Cable Range	Thread Type & Size	Dimensions in Inches (mm)			
			A	B	C	F
-76°F to 221°F (-60°C to 105°C)			Clearance Hole	Body Length	Thread Length	Wrench Flats
 (Nylon Spline)	Inches (mm)	Page 55 for Thread Specs	+ .01" (+.25 mm)	(Clamp)		
CD09NA-EZ-D	.20 - .39 (5 - 10)	3/8" NPT	.68 (17.2)	1.18 (30)	.63 (16)	.79 (20)
CD16NA-EZ-D	.39 - .55 (10 - 14)	1/2" NPT	.83 (21.1)	1.34 (34)	.79 (20)	.94 (24)
CD21NA-EZ-D	.51 - .71 (13 - 18)	3/4" NPT	1.05 (26.7)	1.50 (38)	.81 (20.5)	1.18 (30)
CD29NA-EZ-D	.71 - .98 (18 - 25)	1" NPT	1.35 (34.3)	1.73 (44)	.98 (25)	1.57 (40)
CD29LA-EZ-D	.87 - 1.26 (22 - 32)	1 1/4" NPT	1.65 (41.9)	2.03 (51.5)	1.02 (26)	1.97 (50)
CD36NR-EZ-D	.87 - 1.26 (22 - 32)	1 1/2" NPT	1.92 (48.7)	2.03 (51.5)	1.04 (26.5)	1.97 (50)
CD12MA-EZ-D	.12 - .26 (3 - 6.5)	M12 x 1.5	.47 (12)	1.02 (26)	.63 (16)	.55 (14)
CD17MA-EZ-D	.20 - .39 (5 - 10)	M16 x 1.5	.63 (16)	1.18 (30)	.63 (16)	.79 (20)
CD22MA-EZ-D	.39 - .55 (10 - 14)	M20 x 1.5	.79 (20)	1.34 (34)	.63 (16)	.94 (24)
CD25MA-EZ-D	.51 - .71 (13 - 18)	M25 x 1.5	.98 (25)	1.50 (38)	.63 (16)	1.18 (30)
CD32MA-EZ-D	.71 - .98 (18 - 25)	M32 x 1.5	1.26 (32)	1.73 (44)	.63 (16)	1.57 (40)
CD40MA-EZ-D	.87 - 1.26 (22 - 32)	M40 x 1.5	1.57 (40)	2.03 (51.5)	.63 (16)	1.97 (50)

Viton® is a federally registered trademark of DuPont Dow Elastomer.

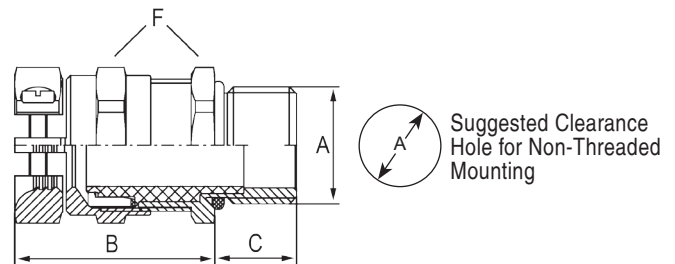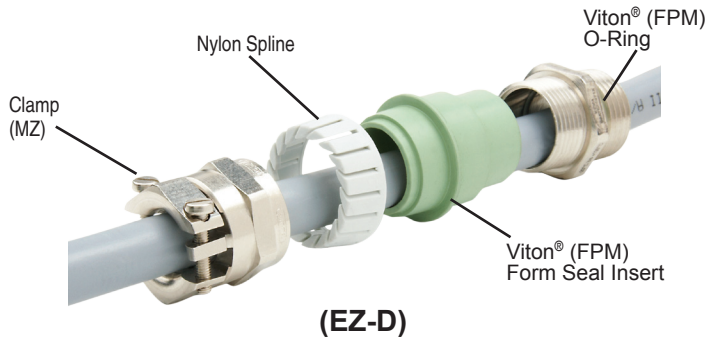

Nickel Plated Brass with MZ Clamps

- Extra Pull-out Resistance
- Liquid Tight to IP68/NEMA 6

Longer Threads: All Ex-d Standard style cable glands have longer threads to meet the five thread engagement requirement. Metric threads require eight threads of engagement. Manufactured according to EN 60079-1 or IEC 60079-1, which addresses the ANSI B1.20.1/1.20.3. ANSI. NPT cable glands do not come with an O-Ring.



Ex-d EXIOS
Ex-d Nickel Plated Brass & Stainless Steel Glands
Nylon Glands
Ex-e
Ex-e Multi-Hole & Romex Glands
Ex-e Nickel Plated Brass & Stainless Steel Glands
Ex-e FM/RRF Nickel Plated Brass Glands
Ex-e Conduit & Fitting Systems
Ex-e/Ex-d Accessories
Technical Information